Applied Physics B manuscript No.
(will be inserted by the editor)

arXiv:quant-ph/0512089v2 26 Dec 2005

Fast polarimetry system for the application to spin quantum non-demolition measurement

M. Takeuchi[1], T. Takano[1], S. Ichihara[1], A. Yamaguchi[1], M. Kumakura[123], T. Yabuzaki[4], and Y. Takahashi[13]⋆

[1] Department of Physics, Graduate School of Science, Kyoto University, Kyoto 606-8502, Japan
[2] PREST, JST, 4-1-8 Honcho Kawaguchi, Saitama 332-0012, Japan
[3] CREST, JST, 4-1-8 Honcho Kawaguchi, Saitama 332-0012, Japan
[4] Faculty of Information Science and Arts, Osaka Electro-Communication University, Osaka 572-8530, Japan

Received: / Revised version:

Abstract We report the development of a fast pulse polarimeter for the application to quantum non-demolition measurement of atomic spin (Spin QND). The developed system was tunable to the atomic resonance of ytterbium atom and has narrow laser linewidth suitable for spin QND. Using the developed polarimeter, we successfully demonstrated the measurement of the vacuum noise, with 10^6 to 10^7 photon number per pulse.

PACS 42.25.Ja; 42.50.Lc; 42.55.Px

1 Introduction

Recently, interest in the quantum nature of atomic ensembles has been growing. To measure the quantum nature of the atomic ensembles, one of the most useful interaction is paramagnetic Faraday rotation of light [1]. Under some conditions, the probing of the atomic ensembles via the paramagnetic Faraday rotation with a polarimeter becomes quantum non-demolition measurement of spin (spin QND) [2,3,4].

Spin QND is not only a quantum measurement, but also has a wide variety of the applications. For example, spin squeezing, entanglement of two macroscopic objects, and quantum memory for light have been demonstrated [5,6,7,8]. These application of spin QND will be some breakthroughes not only in precision measurements but also quantum information processings.

If we can perform the spin QND successively on the same atomic ensemble system, various interesting applications such as quantum teleportation would become possible. For such purposes, each probe time T must be much shorter than the spin coherence time of the system T_2. Moreover, the probe laser should be tunable to a particular atomic resonance, and the detuning Δ of the probe laser frequency from atomic resonance should be larger than the atomic linewidth Γ; $\Delta > \Gamma = \tau_{\rm e}^{-1}$ is required, where $\tau_{\rm e}$ is the lifetime of the excited state, because the decoherence due to the photon scattering should be avoided [9]. The bandwidth of the probe laser $\Gamma_{\rm p}$ needs not to be narrower than the linewidth Γ, but in the case of $\Gamma_{\rm p} < \Gamma$, we can safely ignore the effect of finite bandwidth of the laser in the analysis at any detunings. Therefore, we adopt the conditions $\tau_{\rm e} < T \ll T_2$ and $\Gamma_{\rm p} < \Gamma < \Delta$ for ideal spin QND. To the best of our knowledge, the most shortest probe time T in the applications of the spin QND is $T = 50\mu$s in Ref. [7], where $\tau_{\rm e} = 30$ns. Although the polarimeter for the pulse of duration T of much less than one nano-second has developed by use of pulse lasers for the interest in the quantum cryptography [10,11], it is, however, inappropriate for spin QND, because the pulse laser is not tunable to a certain atomic resonance, and has wide frequency bandwidth compared with the natural full linewidth Γ. Therefore, it is necessary to newly develop suitable detector as well as the light source.

In this paper, we report the development of tunable and narrowband fast polarimetry system suitable for the application to spin QND, and also report the measurement of the vacuum noise to demonstrate the performance. The pulse width T could be as short as 100 ns, nearly three order of magnitude improvement from the previous experiment of Ref. [7]. Especially, we designed our system tunable for ytterbium (Yb) atomic resonance of ${}^1\mathrm{S}_0 \rightarrow {}^1\mathrm{P}_1$ transition with the resonant wavelength of 399.8 nm, because Yb is one of the best sample for spin QND with long coherence time compared with alkali-atoms. It should be noted that this system is qualitatively different from the previous ones in which a frequency side-band was measured by using spectrum analyzers as in ref. [5]. Technically, the pulse-mode operation in which a single quantum measurement is performed for each pulse [10,11] is usually difficult because the noise

⋆ Fax:+81-75-753-3769, E-mail:yitk@scphys.kyoto-u.ac.jp

of the system must be quantum-noise limited over broad frequency bandwidths.

2 Review of Spin QND

Firstly, let us review spin QND and the vacuum noise. The interaction Hamiltonian of the paramagnetic Faraday rotation takes the form [3],

$$H = \alpha J_z S_z, \tag{1}$$

where α is a real constant. $\mathbf{S}$ is the summation over the individual spin, which obeys the usual commutation relation of angular momenta $[S_i, S_j] = i\varepsilon_{ijk} S_k$, and the z axis is set parallel to the wave vector of the probe light. $\mathbf{J}$ is the quantum-mechanical Stokes vector of the light, which also obeys the usual commutation relation of angular momenta $[J_i, J_j] = i\varepsilon_{ijk} J_k$. For a light pulse with the duration T propagating in free space, $\mathbf{J}$ can be written as $J_x = \frac{1}{2}\int_0^T (a_+^\dagger a_- + a_-^\dagger a_+)dt$, $J_y = \frac{1}{2i}\int_0^T (a_+^\dagger a_- - a_-^\dagger a_+)dt$, and $J_z = \frac{1}{2}\int_0^T (a_+^\dagger a_+ - a_-^\dagger a_-)dt$, where $a_\pm$ is the annihilation operators of $\sigma_\pm$ circular polarization mode, respectively [9]. From the backaction evasion $[S_z, H] = 0$, this can be regarded as spin QND. After the interaction time t_1, the y component of the Stokes vector becomes

$$J_y(t_1) \equiv e^{it_1 H} J_y e^{-it_1 H} \simeq J_y + \alpha t_1 J_x S_z, \tag{2}$$

for $\alpha t_1 S_z \ll 1$. Therefore, by measureing $J_y(t_1)$, we can obtain information about S_z. In Fig. 1, we show the schematic of spin QND. We consider the case that the

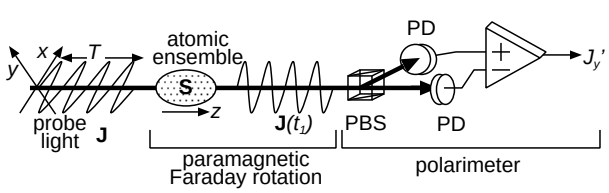

Fig. 1 System of spin QND. The total spin component of an atomic ensemble along z axis S_z can be quantum non-demolitionally measured via the paramagnetic Faraday rotation by a polarimeter. The polarimeter consists of a polarization beam splitter (PBS), a photodiode (PD) and a differential amplifier.

probe light is a coherent pulse which is linearly polarized along x axis and contains $2J \gg 1$ photons on the average, and the polarimeter is set so as to measure the y-component of the Stokes vector $J_y(t_1)$.

The probability of obtaining the value J_y' for the measurement of $J_y(t_1)$ is

$$P(J_y') \equiv \mathrm{Tr}_S \left(\langle J_y' | e^{-it_1 H} \rho_{SJ} e^{it_1 H} | J_y' \rangle \right), \tag{3}$$

where Tr_S is the partial trace for the spin, $|J_y'\rangle$ is the eigenstate of $J_y(t_1)$ with the eigenvalue of J_y' and ρ_{SJ} is the density operator for the initial state of the spin and the probe light. Without the atomic ensemble, $P(J_y')$ becomes [9]

$$P(J_y') \simeq \frac{\exp\left(-J_y'^2/(2\sigma^2)\right)}{\sqrt{2\pi\sigma^2}}, \tag{4}$$

where $\sigma = \sqrt{J/2}$ is the standard deviation. In this paper, we call this distribution of Eq.(4) "vacuum noise". With the atomic ensemble, the distribution $P(J_y')$ is broadened as $\sigma^2 = J/2 + (\alpha t_1 J)^2 \langle \Delta S_z^2 \rangle$, which is easily derived from Eq. (2). In general, the second term can become enlarge compared with the first term by prepareing a large number of atoms. Therefore, if the vacuum noise can be measured with the polarimeter without atomic ensemble, which would be confirmed by the magnitude of σ, and its dependence on J, the performance of the polarimeter is usually sufficient in the application of spin QND [7].

3 Experimental Setup

As the CW light source, we constructed an external cavity laser diode (ECLD). It provides a nominal CW output the power of about 10mW, where we use a GaN laser diode (Nichia NLHV3000E). It is tunable around the resonant wavelength 399.8nm, and has the linewidth of several MHz, which is narrower than the full natural linewidth $\Gamma = 2\pi \times 29$ MHz [12]. To confirm that the laser frequency ω is fixed at the off-resonance of ^{171}Yb, we concurrently monitored the transmission of an optogalvano cell (Hamamatsu L2783-70AR-Yb), whose spectrum is well broadend by the Doppler effects and the buffer gas collision. In Fig. 2, we show the transmission spectrum of the optogalvano cell, which is well broadened compared with the isotope shifts and hyperfine splittings [13], as well as the transmission spectra of the Yb atomic beam and the reference cavity with FSR=750 MHz.

To obtain an appropriate pulse from CW laser, we used a 1st-order diffracted light from an AOM (Isomet 1206C-833). The pulse duration T is variable by an pulser to the AOM. To cut the higher order diffraction and to shape the transverse mode, the diffracted light from the AOM was passed through two lenses and a pinhole. To obtain ideal linear polarization along the x axis, a $\lambda/2$ plate and a beamsplitting Thompson prism (Melles Griot 03PTB001) were also used, whose extinction ratio is 1×10^{-5}. As the adjustment of photon number per pulse $2J$, an neutral density (ND) filter was set in front of the prism. We show these experimental setup in Fig.3. We dare to perform the measurements using the vacuum chamber for the atom source to demonstrate robustness of our sysytem. While the present paper describes the performance of the polarimetry system alone, however, not only the atomic beam but also the cold atoms are ready to be loaded in the vacuum chamber [15].

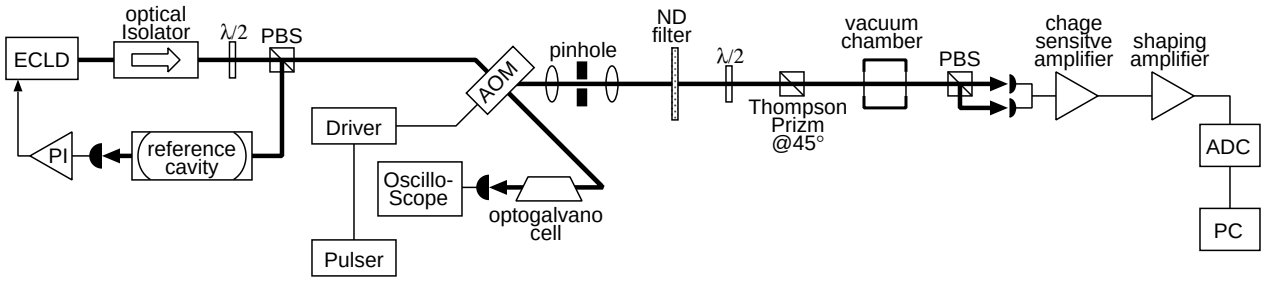

Fig. 3 Experimental setup. As the CW source, we constructed an ECLD. The laser frequency ω was fixed at the off-resonance of ^{171}Yb with a reference cavity and a PI amplifier [14], which was confirmed with the transmittion of an optogalvano cell. By use of an AOM, a pulse of the duration $T \sim 100$ ns was generated. The pulse passed through an neutral density (ND) filter for the adjustment of the photon number per pulse $2J \sim 10^6$, and a vacuum chamber, in which we can load atomic ensemble. After passing through the vacuum chamber, it was analyzed by a polarimeter.

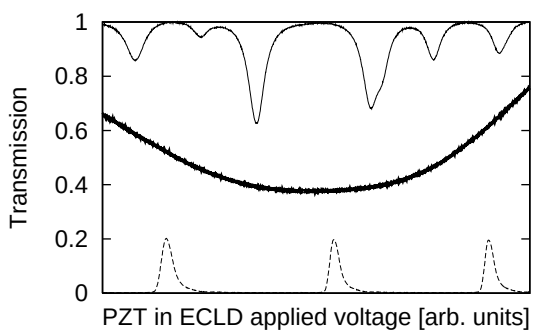

Fig. 2 Transmission spectra of Yb atoms. The solid line is the transmittion of the atomic beam in the vacuum chamber. The bold line is the transmittion of the optogalvano cell, which is broadened due to the Doppler and pressure broadening effect. The dot line is the transmittion of the reference cavity with FSR=750 MHz.

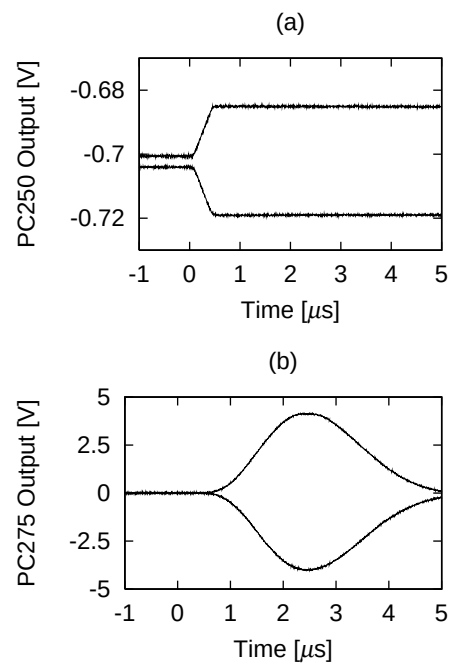

Fig. 4 Responce for a pulse of the duration $T = 400$ ns. To aquire these waveforms, we input a light pulse to the restictive photodiode. (a)Typical waveform of the charge sensitive amplifier. The sensitivity is 0.16 μV/electron. (b)Typical waveform of the shaping amplifier. The input waveform is the ones in Fig. 4 (a). The peak time is 2.3 μs and the gain is typically $G = 2 \times 10^2$.

As the photodetectors (PDs) in the polarimeter, we use sillicon PIN photodiodes (Hamamatsu S5973-02), with quantum effeciency $\eta = 0.9$. As the differential amplifier in the polarimeter, we use a charge sensitive amplifier (Amptek PC250) and a shaping amplifier (Amptek PC275). In Fig.4, we show the response for a light pulse of the duration $T = 400$ ns. The sensitivity of PC250 is $1/C_{\rm f} = 0.16$ μV/electron given by the feedback capacitance $C_{\rm f} = 1$ pF, and the tail length is $R_{\rm f}C_{\rm f} = 300$ μs given by the capacitance and the feedback resistance $R_{\rm f} = 300$ MΩ. The peak time of PC275 is 2.3 μs. The gain of the shaping amplifier is typically set at $G = 2\times10^2$, as is shown in Fig. 4 (b). The voltages at the peak time are read with an analog-digital converter (ADC, Innovative Integration AD40), which corresponds to J'_y and the distribution of J'_y are analyzed on the computer (PC).

4 Measurement of the Vacuum Noise

Here, we explain the procedure and results of the measurement of the vacuum noise. Total photoelectron per pulse in the two PDs $2J$ and the number difference between the two PDs J'_y, is obtained with the following procedure; the average amplitude of the charge sensitive amplifier output corresponds to J and was obtained with the light to one of the PDs blocked. The proportional factor between the voltage and the photoelectron number is determined by the sensitivity of the PC250 $1/C_{\rm f}$. The peak voltage of the shaping amplifier output corresponds to J'_y. The proportional factor between the peak voltage and J'_y is determined also by the sensitiv-

ity of the PC250 and the gain of the shaping amplifier $G/C_{\rm f}$.

In Fig. 5, we show the typical experimental result of $P(J'_y)$, where we set $2J = 3.7\times10^6$ and $T = 400$ ns. This

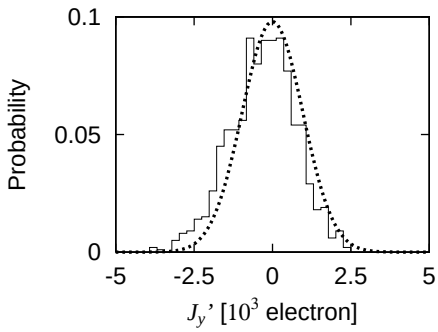

Fig. 5 The distribution of the photon number difference $P(J'_y)$ at (solid line). We constructed this distribution from the signal of 1000 pulses. Simultaneously we show the theoretical curve of Eq. (4) (dot line).

distribution well agree with the theoretical curve of Eq. (4). To evaluate the photon number dependence of the distribution, we examined the standard deviation σ with various photon number per pulse $2J$. In Fig. 6, we show the values of σ with various $2J$. Simultaneously, we show the fitting curve $\sqrt{\epsilon J/2}$, where ϵ is the free parameter and set at $\epsilon = 0.81$. We think that the error is due to

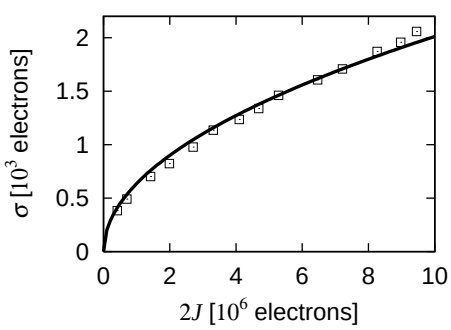

Fig. 6 The standard deviation σ of $P(J'_y)$ with various photon number per pulse (square). Thd solid line is the fitting curve $\sqrt{\epsilon J/2}$, where ϵ is the free parameter.

the precision of $C_{\rm f}$. However, the dependence on $2J$ well agrees with $\sqrt{J/2}$. The intrinstic excess noise was about $\sigma = 8\times10$, which is negligible compared with the vacuum noise for 10^6 to 10^7 photon number per pulse. From these results, we concluded that we could successfully measure the vacuum noise. It is also noted that we confirmed that the measurement of the vacuum noise is possible with the other photodiodes (Hamamatsu S7797, Hamamatsu S9687), and with other durations ($T = 100$ ns , 200 ns, 600 ns).

Finally we note that toward the application to spin QND we have also succeeded in performing two-pulse polarimetry with pulse separation of as short as 5 μs by using two-independent polarimeters developed in this work. The vacuum-noise limited performance was confirmed and no apparent classical correlation was observed between the readouts of the two polarimeters.

5 Conclusion

We successfully measured the vacuum noise of a light pulse from tunable CW laser for atom. Especially, we constructed the system for ytterbium (Yb), because Yb is the best sample for spin QND. The pulse duration $T \sim 100$ ns is much shorter than the previous experiments of the application of the spin QND [6,7,8], which will enhance the abilities of the quantum information processing with atomic ensemble. Moreover, this technique is advantageous for reserach on quantum nature of atomic spin ensemble, such as squeezed spin state [16].

6 Acknoledgements

We thank D. Komiyama for his experimental assistance. We also thank important advices from T. Hirano. This work was supported by the Strategic Information Communications R&D Promotion Programme (SCOPE-S), and Grant-in-Aid for the 21st century COE, "Center for Diversity and Universality in Physics" from the Ministry of Education, Culture, Sports, Science, and Technology (MEXT) of Japan. M. Takeuchi is supported by JSPS.

References

1. See for example, W. Happer, Rev. Mod. Phys. **44,** 169 (1972).
2. A. Kuzmich, L. Mandel, J.Janis, Y.E.Young, R. Ejnisman, and N.P. Bigelow, Europhys. Lett. **42,** 481 (1998).
3. Y. Takahashi, *et al.*, Phys. Rev. A **60,** 4974 (1999).
4. A. Kuzmich, L. Mandel, J. Janis, Y.E. Young, R. Ejnisman, and N.P. Bigelow, Phys. Rev. A **60,** 2346 (1999).
5. A. Kuzmich, L. Mandel, and N.P. Bigelow, Phys. Rev. Lett. **85,** 1594 (2000).
6. B.Julsgaard, A.Kozhekin, and E.S. Polzik, Nature(London) **413,** 400 (2001).
7. J.M. Geremia, J.K. Stockton, and H. Mabuchi, Science **304,** 270 (2004).
8. B. Julsgarrd, J. Sherson, J.I. Cirac, J. Flurášek, and E.S. Polzik, Nature(London) **432,** 482 (2004).
9. L.M. Duan, J.I. Cirac, P. Zoller, and E.S. Polzik, Phys. Rev. Lett. **85,** 5643 (2000).
10. H. Hansen, T. Aichele, C. Hettich, P. Lodahl, A.I. Lvovsky, J. Mlynek, and S. Schiller, Optics Letters **26,** 21 (2001).
11. T. Hirano, H. Yamanaka, M. Ashikaga, T. Konishi, and R. Namiki, Phys. Rev. A 68, 042331 (2003)
12. K. Komori, *et al.*, Jpn. J. Appl. Phys. **42,** 5059 (2003).

13. A. Banerjee, U.D. Rapol, D. Das, A. Krishna, and V. Tatarajan, Europhys. Lett. **63,** 340 (2003).
14. See for example, Fritz Riehle, *Frequency Standards* (WILEY-VCH, 2004).
15. M. Takeuchi, *et al.*, quant-ph/0512056.
16. M. Takeuchi, *et al.*, Phys. Rev. Lett. **94,** 023003 (2005).